


SPECIFICATIONS

Size	Metric	British
Max. Working Height(Indoor) A	7.60m	24' 11"
Max. Platform Height(Indoor) B	5.60m	18' 4"
Max. Working Height(Outdoor)	6.60m	21' 8"
Max. Platform Height(Outdoor)	4.60m	15' 1"
Overall Length C	1.57m	5' 2"
Overall Width D	0.81m	2' 8"
Overall Height(Rails Up) E	2.02m	6' 8"
Overall Height(Rails Down)	1.66m	5' 5"
Platform Size(Length ×Width)	1.37m×0.70m	4' 6"×2' 4"
Platform Extension Size G	0.60m	2'
Ground Clearance(Stowed/Raised)	0.07m/0.015m	3"/1"
Wheelbase H	1.19m	3' 11"
Turning Radius(Inside/Outside)	0.30m/1.60m	1' /5' 3"
Tyres	φ305×100mm	φ305×100mm

Performance		
S.W.L	272kg	600lb
S.W.L on Extension	136kg	300lb
Max. Occupants (Indoor/Outdoor)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	4.0km/h	2.49mph
Travel Speed(Raised)	0.6km/h	0.37mph
Max. Working Slope	1.5°/3°	1.5°/3°
Up/Down Speed	30/23sec	30/23sec

Weight		
Overall Weight	1340kg	2954lb

Power		
Hydraulic Tank	4L	1gal
Battery	24V/115Ah	24V/115Ah
Charger	24V/15A	24V/15A
Driving Motor	2x15VAC/0.68kW	2x15VAC/0.68kW
Lifting Motor	24VDC/2.2kW	24VDC/2.2kW

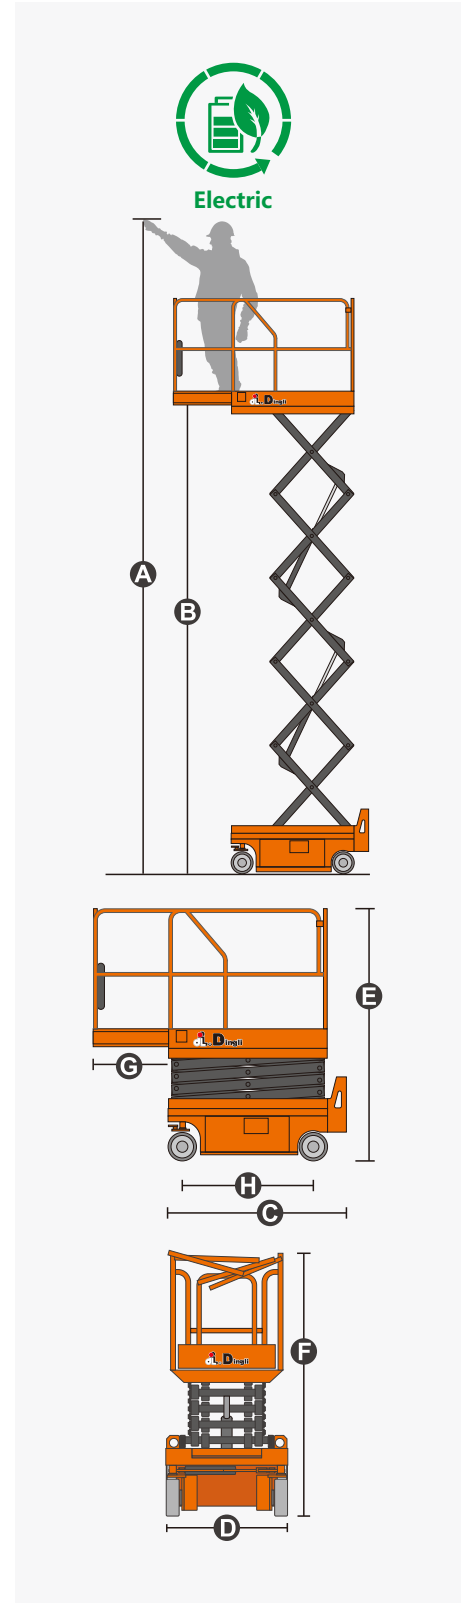

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-lock Gate On Platform
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tires
- 4X2 Drive
- Automatic Brake System
- Emergency Descent System
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Alarm
- All Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing Beacon
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button
- Raised platform



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road,Deqing,HuZhou,Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

[Https://en.cndingli.com](https://en.cndingli.com)