

TM12

SELF-PROPELLED TELESCOPIC MAST LIFT



- Industry-leading self-propelled telescopic mast lift
- Versatile, robust and simple to use
- Drives through a standard doorway
- 0.5m roll-out extension deck
- Ideal for many applications – from construction to stockpicking!

 **snorkel**
www.snorkellifts.com

SELF-PROPELLED TELESCOPIC MAST LIFT

TM12

DIMENSIONS TM12

Max. working height	5.6m
Max. platform height (A)	3.6m
Platform size (stowed)	0.74m x 0.96m
Platform size (extended) (E)	0.74m x 1.46m
Extension deck length	0.5m
Overall width (B)	0.76m
Overall length (D)	1.34m
Stowed height (C)	1.62m
Ground clearance	76mm

PERFORMANCE

Platform capacity (SWL)	227kg
Max. drive height	3.6m
Max. wind speed	12.5m/s
Max. drive speed (stowed)	3.2km/h
Max. drive speed (elevated)	0.43km/h
Raise/lower time	16/19 sec
Gradeability	25%
Max. operating slope (side to side)	2°
Max. operating slope (front to back)	2°
Inside turning radius	0.36m
Outside turning radius	1.55m
Tyres	279mm. non-marking rubber
Parking brake	2 wheel, spring-applied, hydraulically-released with manual overdrive
Drive system	dual front hydraulic motors
Controls	proportional



POWER

Power source	24V 4hp DC electric motor 4-220 Ah batteries
Battery charger	18 amp

WEIGHT

Weight	830kg
--------	-------

TURNING RADIUS

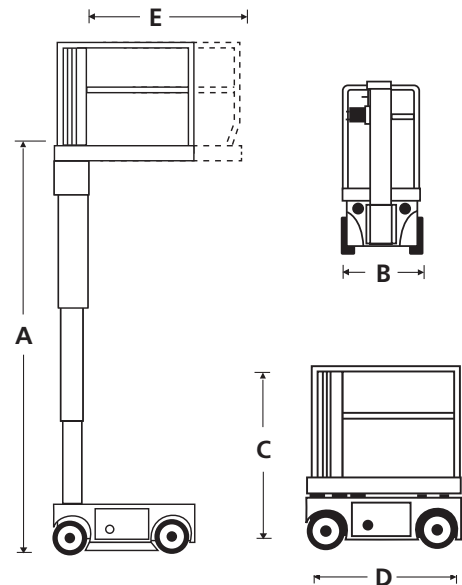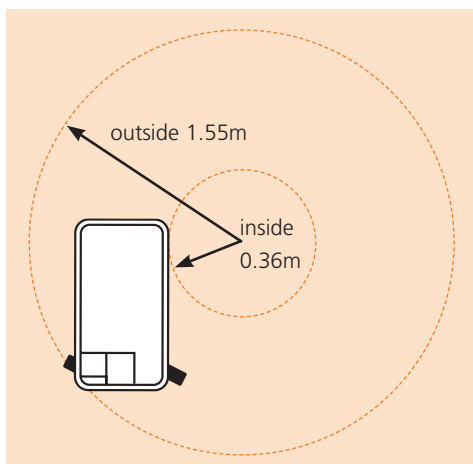

STANDARD FEATURES

- Roll-out deck extension
- Hydraulically powered descent
- Proportional controls
- Saloon-door style entry gates
- Descent and tilt alarms
- Emergency lowering at chassis controls
- Non-marking rubber tyres
- Crane lift points
- Horn
- 2 persons + equipment capacity indoor
- 1 person + equipment capacity outdoor
- Selectable motion alarm
- Integrated battery charger 90V-240V 25A
- Hour meter & on-board diagnostics display
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

- Special paint colours
- Environmental hydraulic oil

snorkel www.snorkellifts.com

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057

e: sales@snorkellifts.com