


SPECIFICATIONS

Metric	British
18.16m	59ft 7in
16.16m	53ft
11.42m	37ft 6in
10.82m	35ft 6in
8.40m	27ft 7in
6.48m	21ft 3in
2.33m	7ft 8in
2.49m	8ft 2in
2.60m	8ft 6in
1.83m×0.79m	6ft×2ft 7in
1.24m	4ft 1in
0.31m	1ft
2.30m	7ft 7in
2.92m/4.49m	9ft 7in/14ft 9in
315/55D20	315/55D20
	18.16m 16.16m 11.42m 10.82m 8.40m 6.48m 2.33m 2.49m 2.60m 1.83m×0.79m 1.24m 0.31m 2.30m 2.92m/4.49m

Performance		
S.W.L	250kg	551lb
Max. Occupants	2	2
Gradeability	40%	40%
Travel Speed(Stowed)	6.0km/h	3.7mph
Travel Speed(Raised)	1.1km/h	0.7mph
Max. Working Slope	X-5°/Y-5°	X-5°/Y-5°
Turret Rotation	360°Continuous	360°Continuous
Platform Rotation	180°	180°
Jib Movement	132°	132°

Weight			
Overall Weight	6830kg	15058lb	

FIRMAN AN192F/7.6kW	FIRMAN AN192F/7.6kW
48V/320Ah	48V/320Ah
48VDC/60A	48VDC/60A
34VAC/9kW	34VAC/9kW
34VAC/13kW	34VAC/13kW
30L	7.9gal
145L	38gal
	48V/320Ah 48VDC/60A 34VAC/9kW 34VAC/13kW 30L

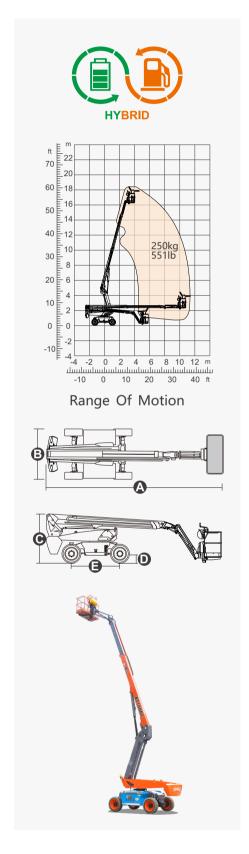



Modular Boom Series



FEATURES

Standard Items

- 1.50m (4ft 11in) Jib
- Front Oscillating Axle
- Two-Wheel Steering
- Four-Wheel Drive
- Self-Leveling Platform
- 180° Left And Right Swing Platform
- Proportional Joystick Controls
- Thumb Rocker Steer
- Drive Enable
- Ac Power Cord To Platform
- Tilt Alarm
- Descent Alarm
- Flash
- Horn
- Hour Meter
- Integral Integrated Special Drive Axle

For Construction Machinery

- 360° Continuous Turntable Rotation
- Positive Traction Four Wheel Drive
- Platform Load Sense System
- Fault Diagnosis System
- Operator Anti-crushing Protection System
- Harsh Environment Kits
- 12V DC Auxiliary Power
- Battery 48V/320Ah
- Driving Motor 9kW 4834rpm
- Lifting Motor 13kW 1855rpm











Telescopic Working Boom-BT Height-18m

Jib

Hybrid-H

Rough Terrain-RT



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











