



SPECIFICATIONS


Size	Metric	British
Max. Working Height A	15.00m	49ft 3in
Max. Platform Height B	13.00m	42ft 8in
Overall Length(Without Outriggers)	3.98m	13ft 1in
Overall Length(With Outriggers) C	4.88m	16ft
Overall Width D	2.33m	7ft 6in
Overall Height(Rails Up) E	3.02m	9ft 11in
Overall Height(Rails Down) F	2.26m	7ft 5in
Platform Size(Length×Width)	4.88m×1.83m	16ft×6ft
Platform Extension Size G/H	1.43m/1.13m	4ft 8in/3ft 8in
Ground Clearance	0.30m	1ft
Wheelbase I	2.86m	9ft 5in
Turning Radius(Inside/Outside)	2.70m/5.50m	8ft 10in/18ft
Tyres	315/55/D20	315/55/D20

Performance		
S.W.L	680kg	1499lb
S.W.L On Extension	227kg	500lb
Max. Occupants (Indoor/Outdoor)	7/7	7/7
Gradeability	40%	40%
Travel Speed(Stowed)	≯6.0km/h	≯3.73mph
Travel Speed(Raised)	≯1.0km/h	≯0.62mph
Max. Working Slope(X/Y)	2°/3°	2°/3°
Up/Down Speed	70/62sec	70/62sec

Weight		
Overall Weight(Without Outriggers)	7610kg	16777lb
Overall Weight(With Outriggers)	8510kg	17968lb
Overall Weight(Without Outriggers/Lithium Battery)★	7180kg	15829lb
Overall Weight(With Outriggers/Lithium Battery)★	8080kg	17813lb

110L	29gal
48V/450Ah	48V/450Ah
48V/420Ah	48V/420Ah
48V/60A	48V/60A
32VAC/9kW	32VAC/9kW
32VAC/15kW	32VAC/15kW
	48V/450Ah 48V/420Ah 48V/60A 32VAC/9kW

Note: Parameters with "★" are optional

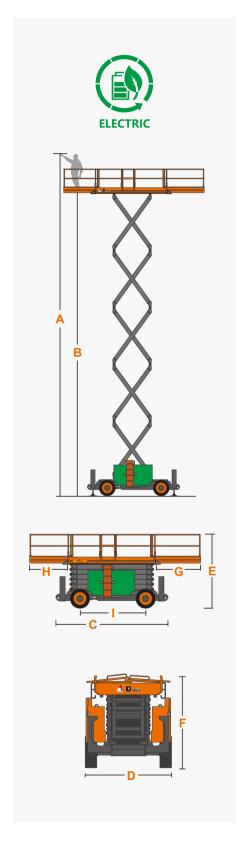





FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Dual Slide-Out Platform Extension Deck
- Four-Wheel Drive
- Two-Wheel Steering
- Drive axle
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic oil cooling system
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Oscillating Axle Chassis



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











